


10cm

CK-09WF

iXchange Bluetooth Built in Car Kit

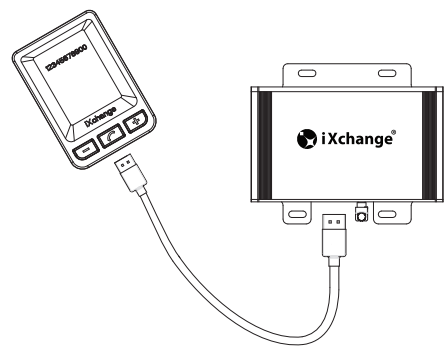

User Manual

Contents

Product Specifications
Components
CK-09 overview
Installation guideline
Started installation
Connections at electronic box
Pairing your CK-09
Using your CK-09
Special Features
Using this car kit
Declaration of Conformity

1
1
2
2-3
4
5
6
7
8
8
8


PRODUCT SPECIFICATIONS

Bluetooth® Specification:	v5.1 +cVc8.0
Bluetooth Profiles Supported:	HSP V1.2, HFP V1.7 and A2DP V1.3
Operating Distance:	10 meters
Operating Temperature:	0-50 degree Celsius
Dimension Electronic Box:	120mm x 100mm x 36mm
Dimension LCD Display Panel:	60mm x 85.5mm x 14.5mm

*May be varied by mobile phone settings and operator

COMPONENTS


Thank you for choosing the iXchange Bluetooth built-in Car Kit.
We hope you enjoy it! Inside the package, you should find:

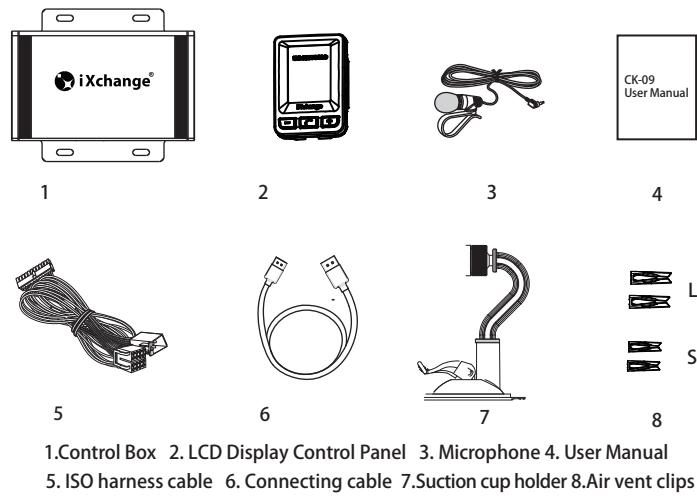

CK-09 OVERVIEW

Following the below diagram of the control box, you can verify the different cable connection within the box.

1. MICROPHONE: external microphone connection - please plug the corresponding Aux-Out socket of the control box
2. LCD Display control Panel - external LCD display connection, please plug the corresponding Aux-Out socket of the control box
3. PWR/LSP/LINEOUT - 20-pins socket - power supply of the car kit's music and voice output offered by ISO cable harness

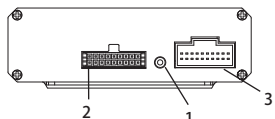

INSTALLATION GUIDELINE

Installation - general rules



This car kit's installation can be worked out by user, while we recommend the user following the installation requirement subject to your country's regulation. We also recommend the user assign a specialized workshop to undertake the installation if necessary.

Power Supply System for the car kit

This car kit designed for vehicles having 12 volts on-board supply system. It requires to use a voltage converter if you use this car kit to the vehicles with 24 volts on-board supply system.


Installing Position

When installing the car kit, Avoid to install at the position which affect your eyesight while driving. Also avoid mounting the car kit's components on passenger compartment or airbag inflation zones. You should have special tools and knowledge should you need to remove coverings (with or without airbags or dashboard's components, if any cases.




Intended use

Please do not expose the car kit to moisture, extreme temperatures or shocks and follow the installation procedure and guideline.

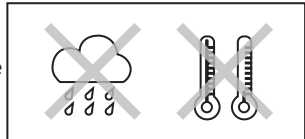


Use while driving

User should use the car kit to avoid the situation which endanger, harm, or annoy other road users. We recommend the volume setting to the level which the user can still aware the exterior noise condition.



Faults

Should you detect the car kit's not function properly, contact your dealer. Improper repairmen can be dangerous for the user. We recommend skilled personnel to perform inspections.



Other notes:

To drive safely, driver should not use a hand held phone, including sending or reading text or picture messages during driving.

Using mobile phone while driving is a distortion act which poses a safety risk to the drivers.

We strongly recommend the drivers use a hands-free car kit to make telephone calls while driving.

The performance of the Car Kit will be affected if the paired mobile device running several apps bringing down the processing performance.

STARTING INSTALLATION

Installation of control box

Place the electronic control box at appropriate position inside the vehicle. It can be located behind the radio, in the glove box or in the center console. Ensure easy access to the box for various cable connections. When connecting the components to the control box, power off the box for safety installation purpose. If doing so, consider the radio coding. The box should not hang loosely in the vehicle.

Installation of ISO harness cable


While laying the cables, please do not lie/hang unsecured in the vehicle and influence the conducting of the vehicle. Avoid crushing the cable which might cause damage of the insulation driven by friction or rubbing

Installation of the LCD display panel

Before mounting the control panel, please select the most appropriate locations inside your vehicle. Use the cleaning cloth to remove any grease or dirt from the surfaces before mounting. The control panel only stuck down once. Re-stick the control panel cause damage of adhesive surface which affect the mounting's performance. Wide temperature variation inside the vehicle also enables the control panel's surface colour fade during subsequent use.


Installation of microphone

Install the microphone either at the A-pillar, at the sun shield or at the roof interior. Please refer to the vehicle documents of different equipment features.




CONNECTIONS AT ELECTRONIC BOX


Step 1: Turn on the car radio system, pull on and remove the ISO cable

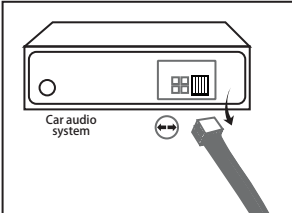

Step 2: Using car audio system connector to connect car audio system and car speaker system connector to connect car speaker system

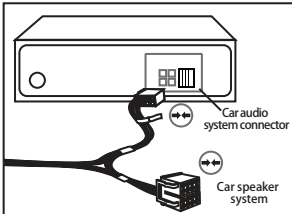


Step 3: Putting the control box connection connector to CK-09 Control Box

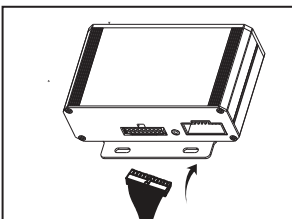

INSTALLATION OF LCD DISPLAY PANEL

You have multiple installation of the LCD DISPLAY CONTROL PANEL:

1. The LCD display control panel with vent clips. Two size of vent clips are provided, the display mount attaches easily and securely to most of air vent.
2. The LCD display control panel with the strong suction cup. It can be installed on the windshield, dashboard, table securely. The fully 270-degree rotation allows for optimum viewing.



The LCD display is support

1. Caller name and phone number at incoming call.
2. Missed call ID and phone number.
3. Song's details and lyrics. (based on the setting of music player)

*If 2 phones are connected, the caller details on 1st connected phone will be shown, not the 2nd one.

PAIRING YOUR CK-09

Pairing Your CK-09 with a Bluetooth wireless technology enabled device

1. Power on the car, CK-09 will automatically turn on. The LCD display will turn on and stay on the home page.
2. Press the MFB button for 5 seconds to switch CK-09 to the pairing mode, and switch your mobile device to Bluetooth Pairing mode as well.
3. Search pairing code name "CK-09WF" and enter the Passcode "0000". If your device supports "Simple Pairing" function, no code is required.
4. Once your mobile device showing connected, your device is paired with CK-09



Pairing the second devices with CK-09

1. Turn off the first paired device.
2. Pair CK-09 with the second device (follow the steps like first device pairing process from point 2 to 4)
3. Turn on the Bluetooth fuction on your mobile device & tap CK-09 to connect manually. (It will be automatically connected to both devices next time when you start the car.)



(If 2 phones are connected, the caller details on 1st connected phone will be shown, not the 2nd one.)

USING YOUR CK-09

In standby mode

Make a Call

Dial the number on your phone and the call will automatically transfer to your CK-09.

Last Number Redial

Press MFB twice, CK-09 will redial the last caller's number and the caller's ID and number will be shown on the display.

Reset

Press both Volume +/- for 5 seconds to activate the Reset mode.

Answer a Call

When there is incoming call, incoming call alert and the LCD display will shows caller's ID and name, push MFB button once [0.5 seconds] to answer a call. The music will stop playing while answering the call.

*If 2 phones are connected, the caller details on 1st connected phone will be shown, not the 2nd one.

Reject a Call

Push MFB button once for 1 second to reject the incoming call. After ending the call, the music playing will resume from CK-09.

Music play mode

Stop music playing

Stop the music playing function button directly from the mobile phonce or car audio system

Song selections - FORWARD / BACKWARD

To select the next song, push Volume + button for 1 second. To select the previous song, push the Volume - button for 1 second.

Volume Adjustment

There are 15 levels for upward and downward volume by pushing Volume +/- button.

Switching music mode between mobile phone and car audio system

Push MFB button for 3 seconds, if the LED light turn blue indicate Car Kit is playing car audio music. By pushing MFB button for 3 seconds again, the LED light turn white-blue indicate Car Kit is playing music from paired mobile device.

SPECIAL FEATURES

Playing Music

Pause / Play Features

While CK-09 under the music playing mode with user mobile devices, user can push the MFB button once to pause the music playing. Push MFB button again, the music playing will be resumed.

Incoming call or voice dialing via the Instant Messaging Apps while music is playing. When there is an incoming call from instant messaging apps or user want to dial the caller via voice dialing mode, the music will stop playing, after ending the call, the music will resume for playing.

USING THIS CAR KIT

This car kit used with mobile telephone with Bluetooth feature, please comply with the regulations and laws subject to the country where you are using this car kit.

DECLARATION OF CONFORMITY

We, iXchange, declare that the following product:

Product Name: iXchange Bluetooth Built in Car Kit

Model No.: CK-09WF

is in conformity with the following essential requirements of Council Directive 2014/53/EC (referred to as R&TTE Directive)



Made in China